




Yihe Core

YIHE CORE PS

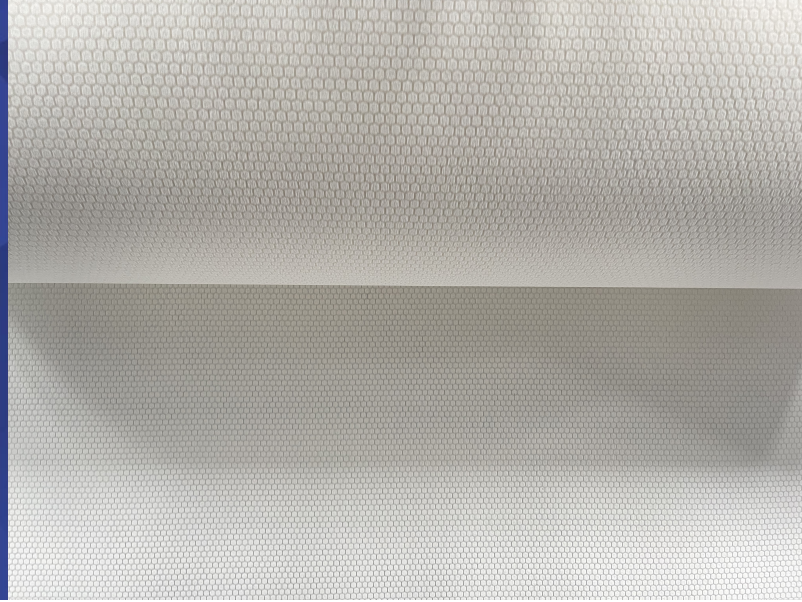

YIHE CORE PS

- The cost effective solution for closed mould process
- It is used as core material and infusion medium
- It is a pressure stable polyester non-woven and compatible with all regular types of resins, including Unsaturated Polyester Resin, Vinyl ester, Phenolic and Epoxy
- It is suitable for closed mould processes, including Infusion, RTM Light, RTM Heavy

APPLICATIONS YIHE CORE

- Marine: hulls, decks and structures of boats and yachts
- Transportation: parts and panels of cars, trailers, trucks and RV' s
- Mass transit: interior and exterior of trains, light rail and buses
- Leisure: kayaks, surfboards, pools and tubs ,Swimming Pool and bathroom
- Industrial: Furniture , cladding panels, fans, containers and tanks
- Wind energy:nacelle covers and spinners

BASIC PROPERTIES

Properties		PS	PS
Thickness	mm	2.0	3.0
Thickness loss at 0,8bar	%	< 8	< 8
Roll length	m	80	50
Roll width	m	1.27	1.27
Max processing temperature	°C	170	170
Dry weight	g/m ²	130	170
Resin uptake	kg/m ² /mm	0.4-0.6	
Density impregnated	kg/m ³	500-800	

ADVANTAGES

- The product has a diversion groove as a diversion medium; No need to use additional diversion materials
- Better compressive performance compared to polyurethane
- As a choice for low-cost core materials
- Reduce product weight
- Increase product rigidity
- Can make the appearance of the product more beautiful
- Excellent conformal performance
- Excellent impact resistance
- The thickness of the product can be controlled as needed
- Max Core 3mm, hexagonal core with non-absorbing resin, low compression rate (10%@-0.8bar)
- Flow channel 0.5mm, between adjacent hexagons to accelerate resin flow

YIHE CORE PS TYPICAL MECHANICAL PROPERTIES (WITH UNSATURATED POLYESTER RESIN)

Mechanical properties	Unit	Value	Test Method
Flexural strength	Mpa	16	ASTM D790
Flexural modules	Mpa	1000	ASTM D790
Tensile strength across layers	Mpa	6	ASTM C297
Compression strength:10%strain	Mpa	4	ISO 844
Shear strength	Mpa	6	ASTM C273-61
Shear modules	Mpa	40	ASTM C273-61

Notes:

The information contained in this document has been compiled in good faith by Suzhou Yihe New Material Co., Ltd., but nevertheless no representation or warranty is given as to the accuracy or completeness of the (technical) information provided herein. Suzhou Yihe New Material Co., Ltd., can not be held liable of any damages arising from any (printing) errors or omissions in this information. Suzhou Yihe New Material Co., Ltd reserves the right to make changes with respect to the information provided at any without further notice.